

1. Introduction

1.1 Overview

Welcome to ScanMarker Pro – your portable scanning and reading solution. This standalone device is designed to make reading, translating and capturing information effortless. Explore its features to enhance your reading experience.

1.2 Turning On the Device

To turn on your Scanmarker Pro, press and hold the power button located on the side of the device until the LED indicator lights up. The device will initiate, and you'll be ready to start using its powerful features.

Start Scanning Text & Reading Live

Power On/Off: Press and hold the power button for about 3 seconds.

If the display does not light up, charge the battery for approximately 30 minutes and then attempt again.

Buttons & Connectors



2. Features



2.1 Read

The Read function is the red icon.

Offline languages supported are **English, Spanish, Italian, French and German** .

Online languages support - 56 :

Chinese-Simplified Cantonese-Traditional, Chinese-Traditional ,English-US Arabic-Egypt
Danish German Spanish-Spain Finnish French Italian Japanese Korean Dutch Polish
Portuguese Russian Swedish South African Indonesian Malaysian Catalan - Spain Czech -
Czech Republic Filipino - Filipino Croatian Lithuanian Hungarian Icelandic
Norwegian Bokmal - Norwegian Romanian Slovak Slovenian Vietnamese Turkish Greek
Bulgarian Serbian Ukrainian Persian Hindi Thai Tamil Estonian Azerbaijani Belarusian
Nepalese Bengali Latvian Mongolian-Chinese Urdu Uzbek Kazakh Kyrgyz Macedonian
Macedonian Pashto-Afghanistan


ScanMarker Pro allows you to effortlessly scan and read printed text. Simply slide the device over the text, and the integrated OCR technology will convert it into digital text, displayed on the device's screen.


You can scan printed text from paper and you can also scan text from a screen display such as from a phone or tablet screen.


Reading can be set on a single line or multiline.

Scanned text will be replaced when read by a new scanned text.

You can read the scanned text multiple times by using the speaker icon 

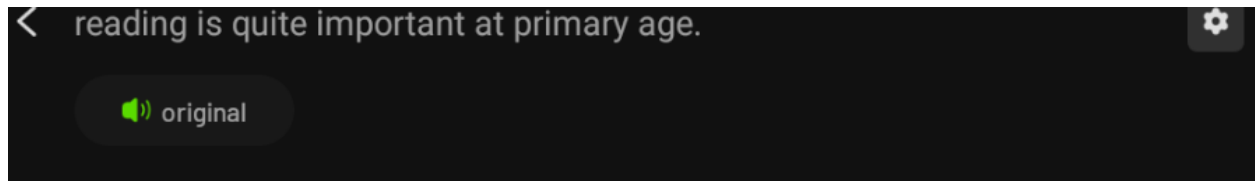

The settings icon  allows you to select between the 56 languages available online.

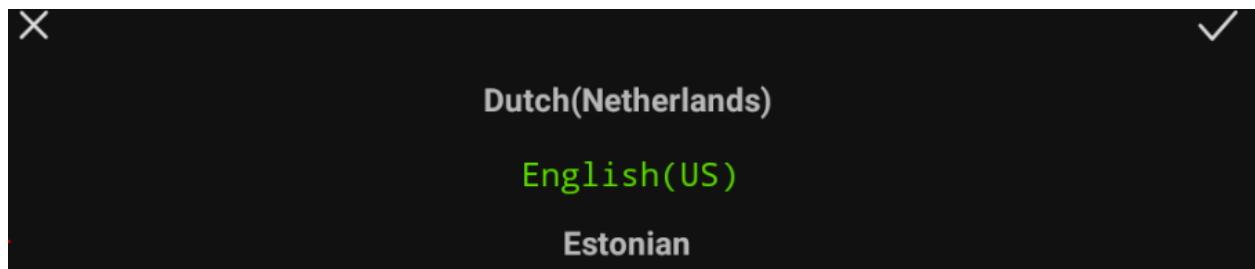


2.2 Dictionary

The Dictionary icon is blue

Scanmarker Pro dictionary is Collins Dictionary in English only

Explore word meanings on the go by using the built-in dictionary feature. Hover over a word, and the device will provide definitions, making it a handy tool for vocabulary enhancement.

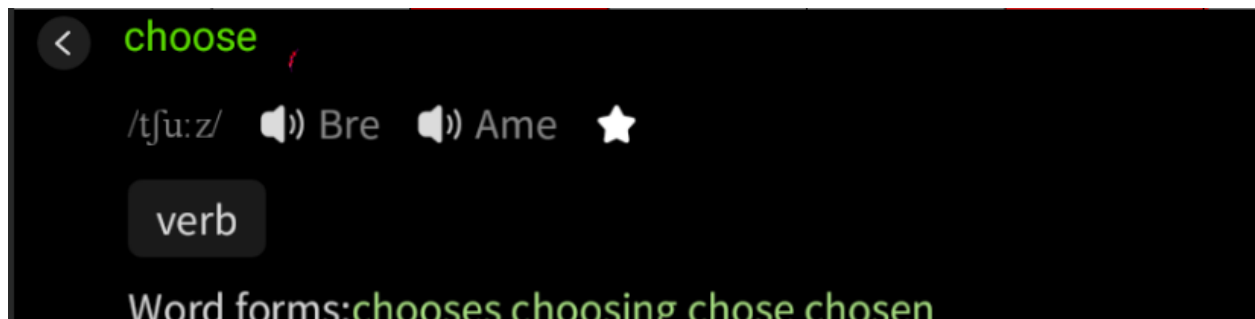


You can listen to the definition of the word in British English or American English..
To listen to the definition, press the speaker icon.
You can save sentences or words you wish to collect and listen to again later by pressing the star icon.

2.3 Translate


The translate icon is green.

Break language barriers with the translation feature. ScanMarker Pro can translate scanned text into multiple languages, allowing you to understand and learn content in your preferred language.

You can alternate between listening to the original text or the translated text by pressing the relevant speaker icon.

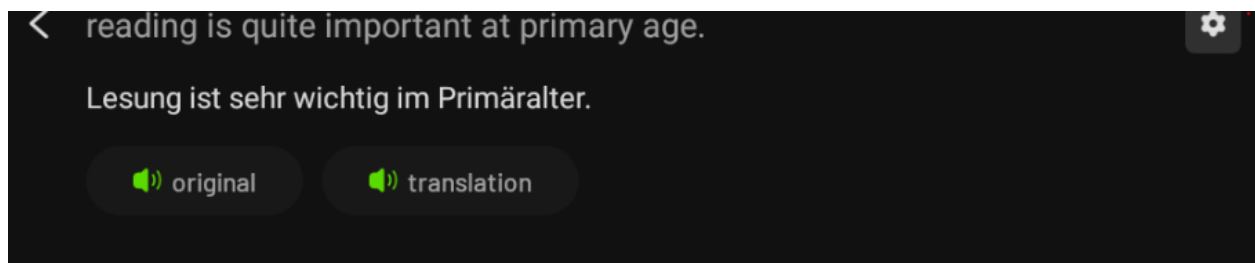


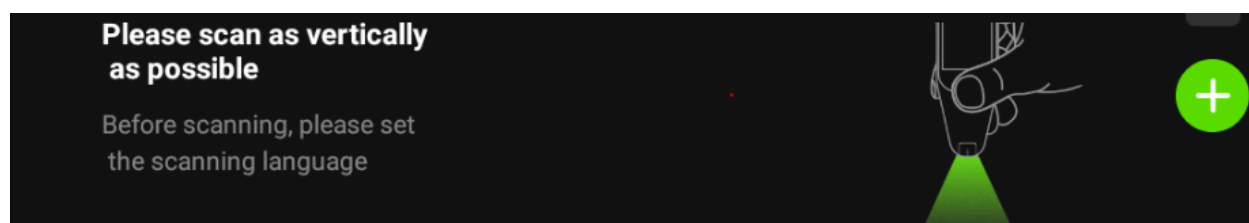
You can switch between 56 languages online to scan and translate.

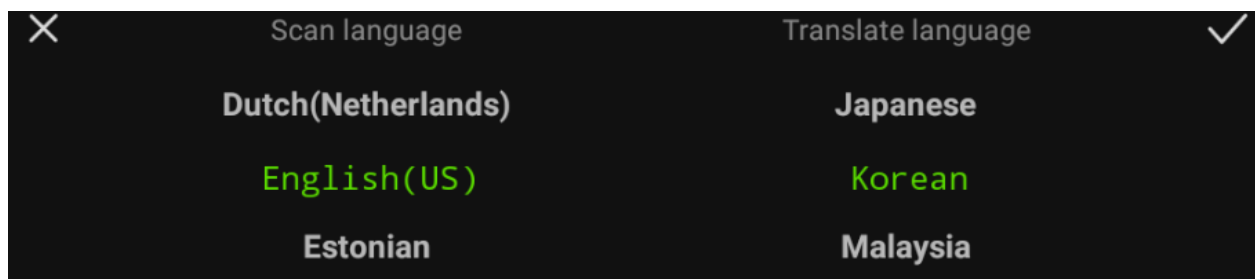



2.4 Export

The export icon is grey.

To start a new file to export press the  icon.




Scan as much text as you need and it will be saved in the file .

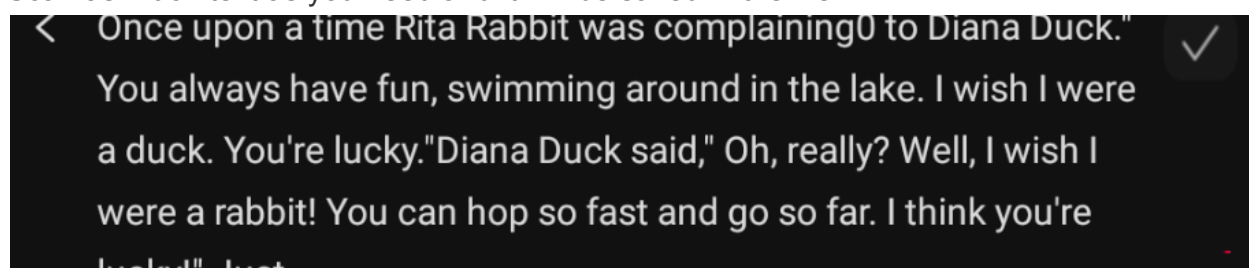

With this function you can take notes and save text for export to a computer for more editing or printing. Export scanned content will be exported as a TXT file , making it easy to store and share information digitally.

you can change the name of the file in the pen

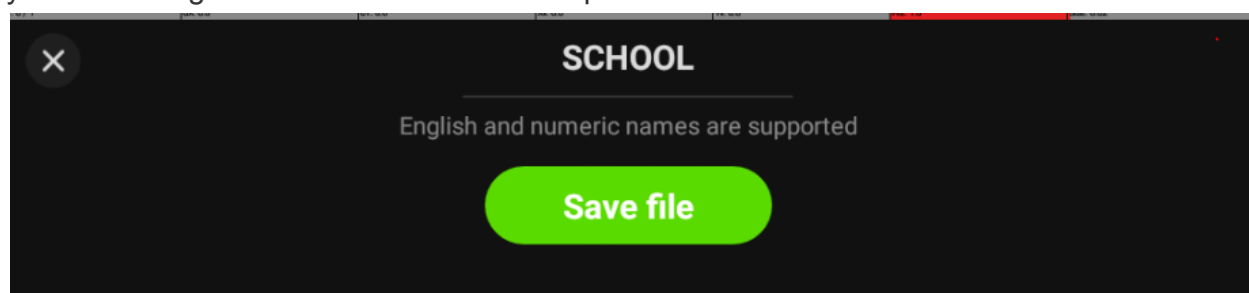

2.5 Speak


This function works with an online connection to the internet.

The icon color is yellow gold.



The translation function supports up to 112 languages.

Enjoy live translating conversation with the speak feature.

Select the languages for speak and translate in the configuration icon settings on the upper left side of the screen.

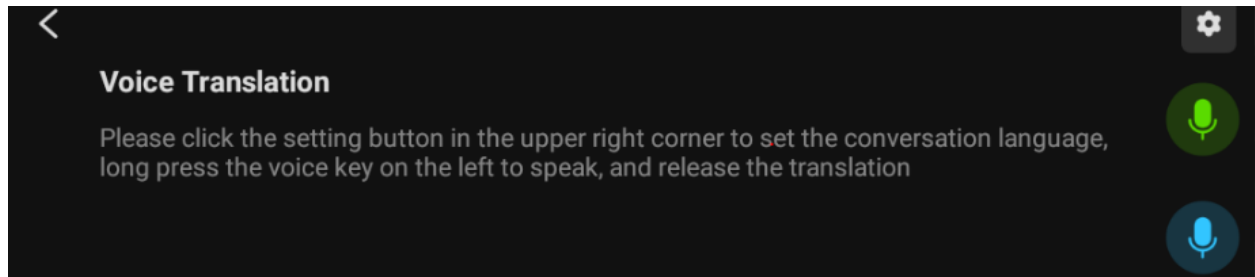


By pressing the microphone, you can translate spoken words and phrases.

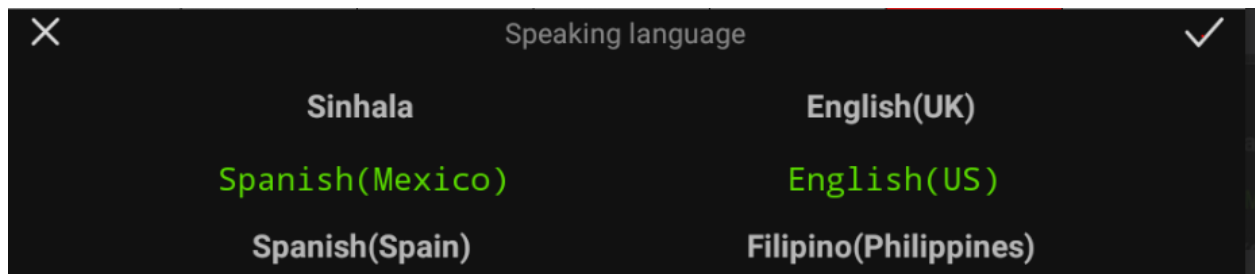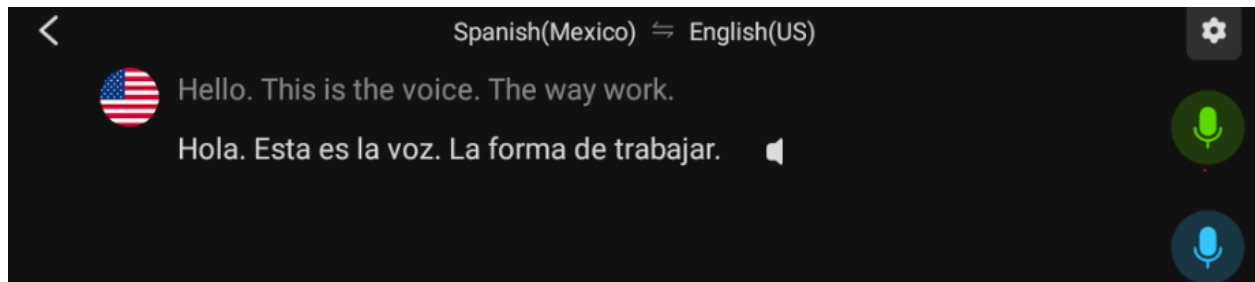


2.6 Recording

Capture important lectures or meetings with the recording feature. ScanMarker Pro allows you to record audio voice memo and save them as mp3 audio files to listen later on the pen or export to a computer.

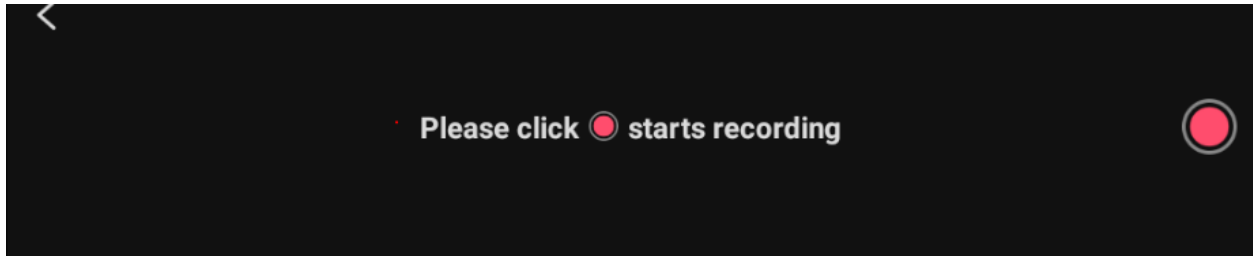

Click on the red icon to start recording .
Once a recording is saved you can remove it later on if needed.



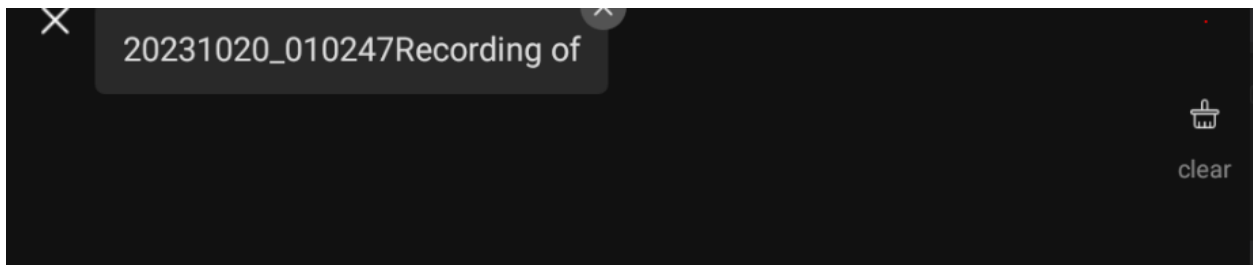


You can pause and play the recording at any time .




2.7 Favourites

This function lets you save text from the dictionary function with the star icon as words or sentences to listen to repeatedly.

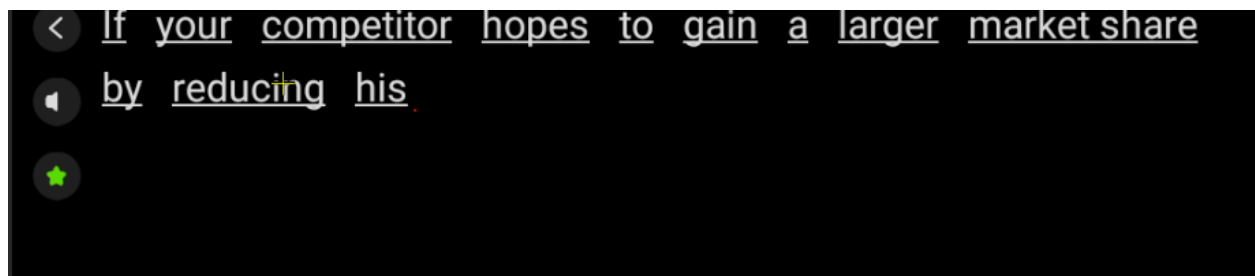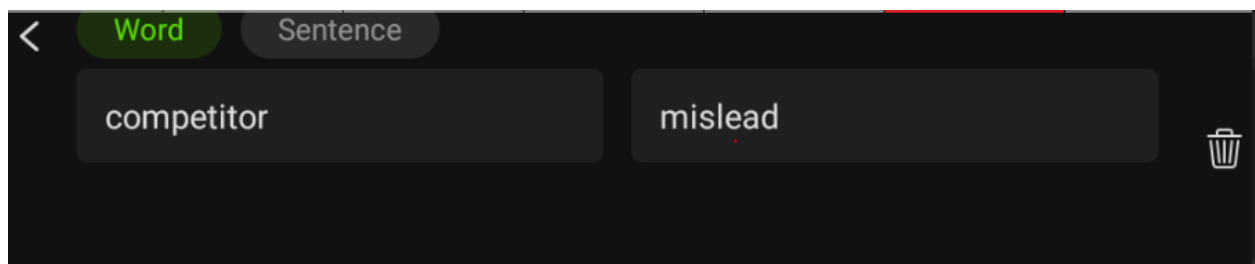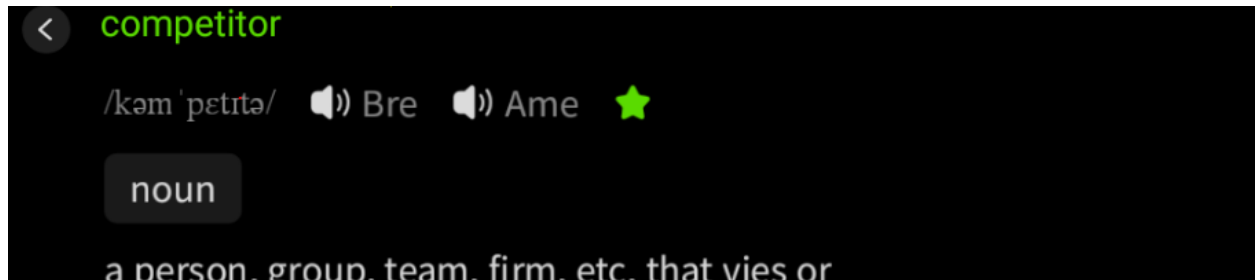


Mark and save your favourite passages for quick access. The Favourites feature ensures that you can easily revisit and review essential information.

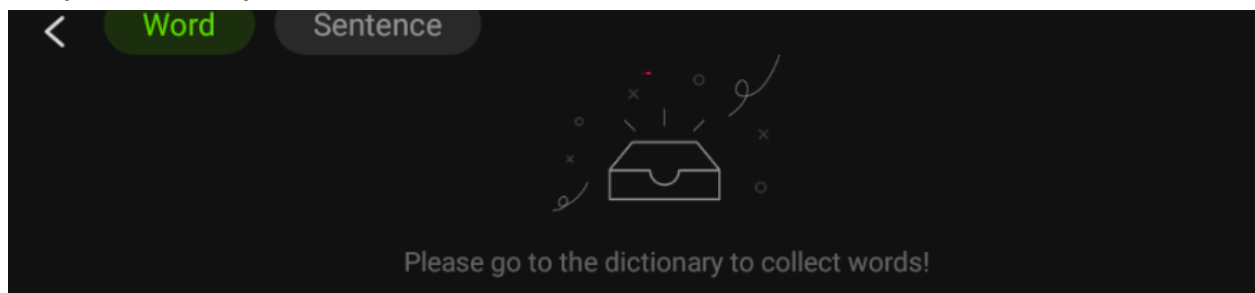

3. Settings

3.1 General Settings

Customize your ScanMarker Pro experience in the general settings. Adjust settings such as brightness, contrast, and scanning speed reading voice and volume to match your preferences.

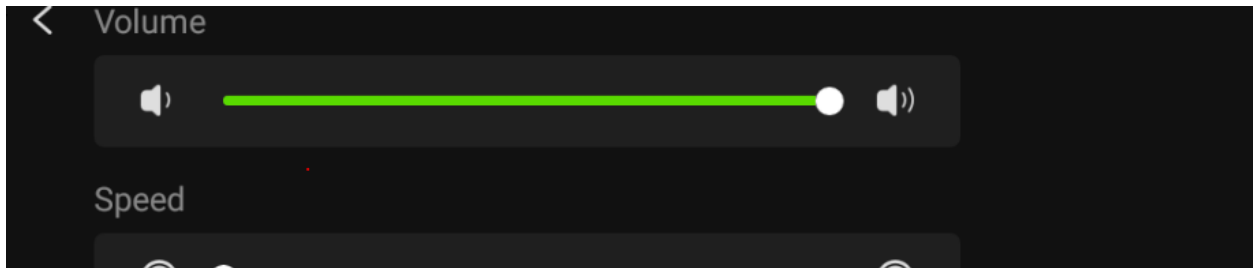


In general settings you also activate the online version of the pen to access multiple languages.

****Currently Scanmarker Pro only supports 2.4G band Wi-Fi.**

3.2 Device Language


Configure language settings of the device and its operative system . Supported languages English, Spanish , German, French and Italian.

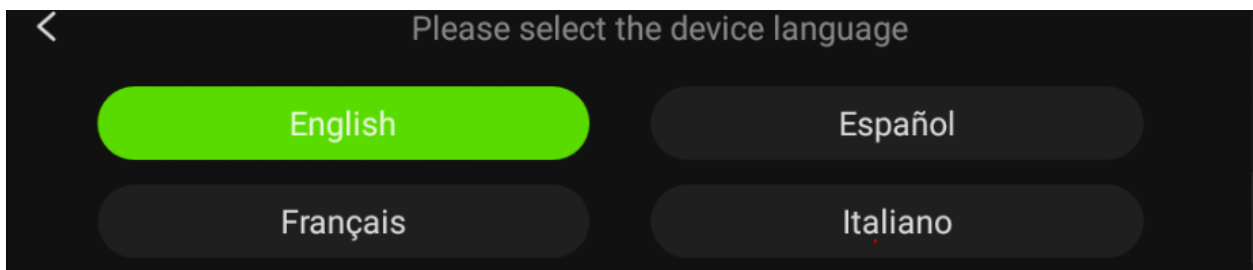


ScanMarker Pro supports multiple languages, ensuring accurate and personalized results.

3.3 Multiline Settings

The multiline settings will display the scanned text in multiple lines in the read function. The multiline function will delay the speaking speed compared as the settings for one line reading.

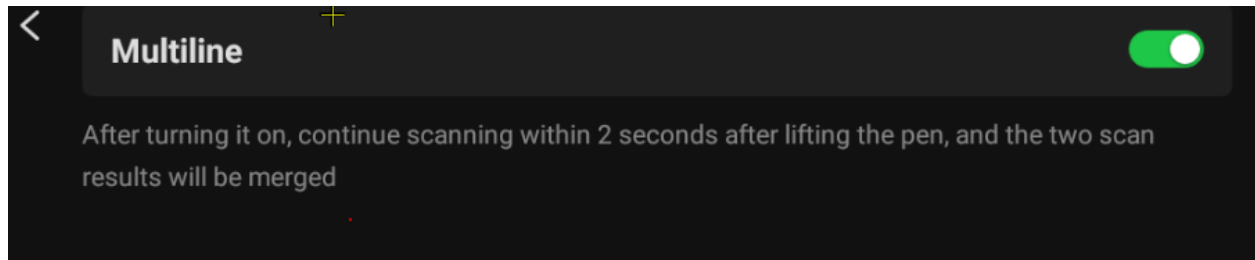

Enjoy your ScanMarker Pro, a versatile and standalone product that transforms the way you read and interact with printed text. If you have any questions or need assistance, refer to the user manual or contact our support team. Happy scanning!

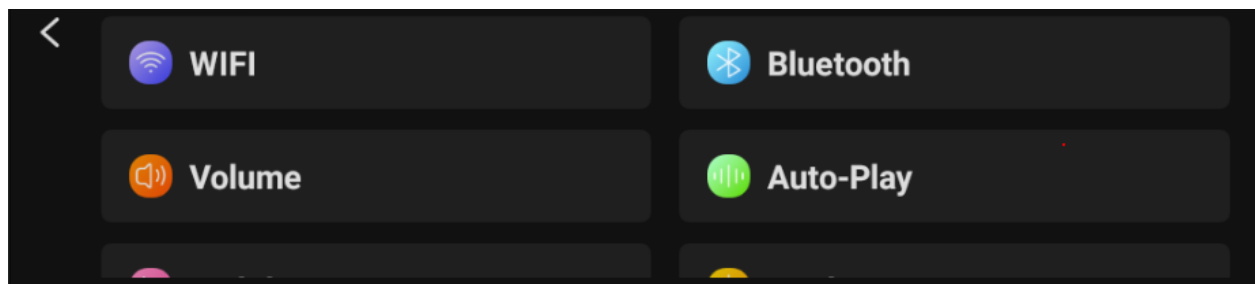

Pro Sizes and specifications:

Product model	scanmarker pro
Product size	153*33*15mm
Processor	Quad-core ARM®Cortex-A7 1.6GHz
Memory	1G+8G (support TF memory card expand)
Screen	4.1 inch full touch screen
Resolution	240*1020
Bluetooth	support bluetooth headset, and speaker
Microphone	dual microphone, noise reduction
Battery capacity	1200mAh
Charging	Type-C 5V/1A

Should you have any questions please contact us by email at contact@scanmarker.com, by chat or by phone.